

Preliminary data-sheet of 25G, 40 km, C-band DWDM Quasi Coherent SFP Transceiver
BFC_SFP25_40F-001-TXX-RYY

Applications


- Mobile fronthaul
- DWDM networks

Features

- Unique high sensitivity long range quasi-coherent detection technology
- Transmission capability up to 25 Gb/s (net data rate)
- Transmission distance up to 40 km standard single mode fiber (SSMF)
- Built-in analogue dispersion compensation
- 100 GHz ITU grid, C-Band
- SFP-28 package, dual LC connectors
- Operating case temperature -40°C to +85°C
- Compliance: RoHS, SFP, MSA

Electrical and optical characteristics

Parameter	Min	Typ	Max	Unit	Condition
Data rate		25 Gbps			Net data rate, NRZ modulation
Receiver Sensitivity		-24		dBm	Measured with data rate at 25.78125Gb/s, Tc=25degC, BER < 5E-5 with PRBS 2e31-1
20 km Optical path penalty		0		dB	Measured with data rate at 25Gb/s, Tc=25degC, BER < 5E-5 with PRBS 2e31-1
40 km Optical path penalty			6	dB	Measured with data rate at 25Gb/s, Tc=25degC, BER < 5E-5 with PRBS 2e31-1
Optical Center Wavelength		1550		nm	As per ITU-T 694.1 ITU channel number for transmitter (TXX) and receiver (RYY) should be specified when ordering
CDR chip		N/A			Semtech GN 2146C
Power consumption		1.75 2.25		W W	25°C ambient temperature C-Temp (0-85°C)

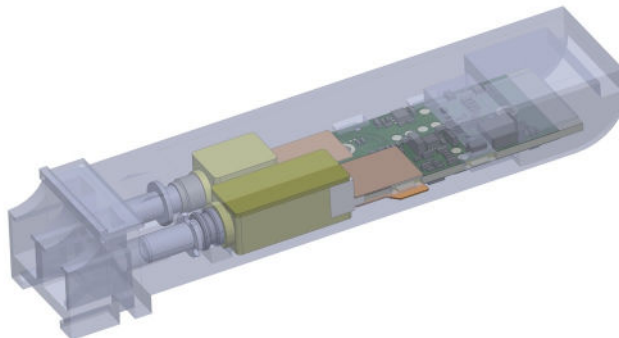

CAUTION: This device is susceptible to damage as a result of electrostatic discharge.

Take proper precautions during both handling and testing. It is highly recommended to follow relevant guidelines such as JEDEC 108-A.

Disclaimer: The information and specifications provided in this datasheet is subject to change without notice. Bifrost Communications ApS cannot be held responsible for any consequences of any errors or missing information in the data provided in this document.

Ordering information - please contact info@bifrostcommunications.com